

Test Date: March 31, 2016

## 2011 MARITIMO M73

One (1) Seakeeper 26 was installed on a Maritimo M73 to provide roll stabilization at anchor and underway. This report summarizes the results of tests conducted by Twin Disc Pacific in Gold Coast, Australia, on March 31, 2016, to measure the performance of the Seakeeper system at zero speed in beam seas.



## RESULT: 92% ROLL REDUCTION

In the sea conditions listed below, the Seakeeper 26 eliminated 92% of roll at the vessel's natural roll period.

BOAT SPECIFICATIONS	
Length Overall	24.8 m
Beam Overall	6.7 m
Displacement	61,000 kgs
Natural Roll Period	3.94 seconds


SEAKEEPER CONFIGURATION	
Seakeeper Model	Seakeeper 26
Angular Momentum	26,000 N-M-S
Weight	1342 kg
Dimension	1.34 L x 1.42 W x 1.03 H (meters)

TEST CONDITIONS (PROVIDED BY BUOYWEATHER)	
Light winds with a slight chop. Small long period wind swell.	
Wind	SSW 6 to 8 knots
Sea	E 1 m at 12 seconds

## PERFORMANCE DATA

■ Seakeeper On    ■ Seakeeper Off

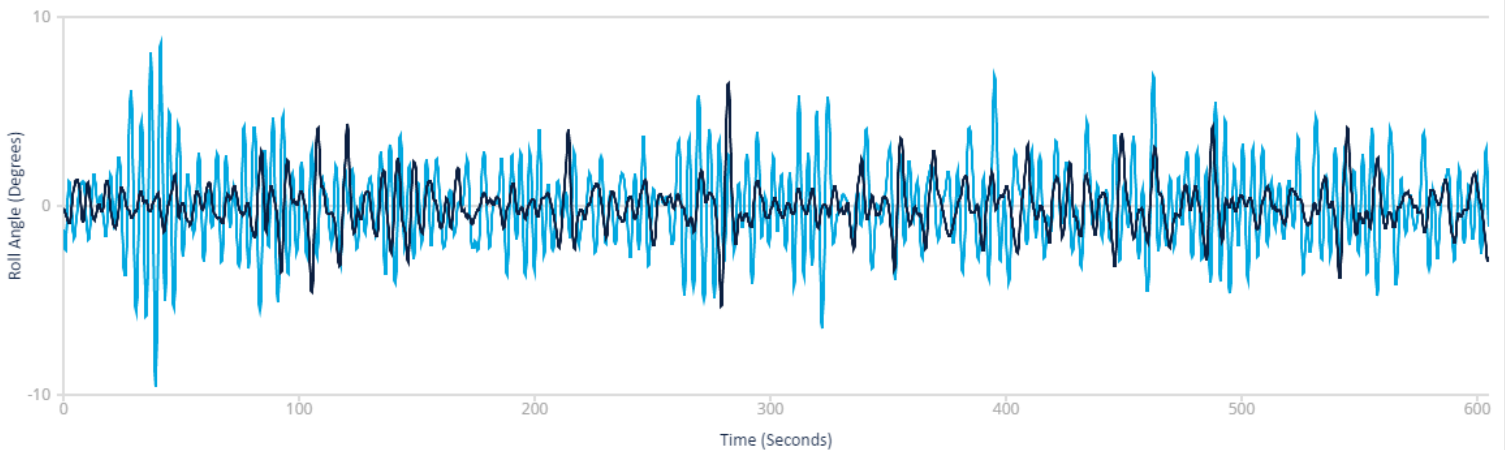

**92% ROLL REDUCTION**

### Notice to Consumer:

The measured roll data contained in this report represents the performance of the Seakeeper system on a specific vessel in an estimated sea condition. It is provided as a guideline and should not be relied upon as representative of performance on this vessel in other sea conditions or on other vessels. Please contact Seakeeper for gyro sizing and roll reduction predictions for your vessel.