

Test Date: October 19, 2016

2016 PRESTIGE 630

One (1) Seakeeper 9 was installed on a Prestige 630 to provide roll stabilization at anchor and underway. This report summarizes the results of tests conducted by Seakeeper in Fort Lauderdale, Florida, USA, on October 19, 2016, to measure the performance of the Seakeeper system at zero speed in beam seas.



RESULT: 72% ROLL REDUCTION

In the sea conditions listed below, the Seakeeper 9 eliminated 72% of roll at the vessel's natural roll period.


BOAT SPECIFICATIONS	
Length Overall	62.33 ft
Beam Overall	16.83 ft
Displacement	71,209 lbs
Natural Roll Period	4.5 seconds

SEAKEEPER CONFIGURATION	
Seakeeper Model	Seakeeper 9
Angular Momentum	9,000 N-M-S
Weight	1210 lbs
Dimension	33.5 L x 35.6 W x 28.3 H (inches)

TEST CONDITIONS (PROVIDED BY BUOYWEATHER)	
Breezy whitecapping conditions with moderate choppy seas. Small long period swell.	
Wind	ENE 12 to 16 knots
Sea	NE 4 ft at 13 seconds

PERFORMANCE DATA

■ Seakeeper On ■ Seakeeper Off

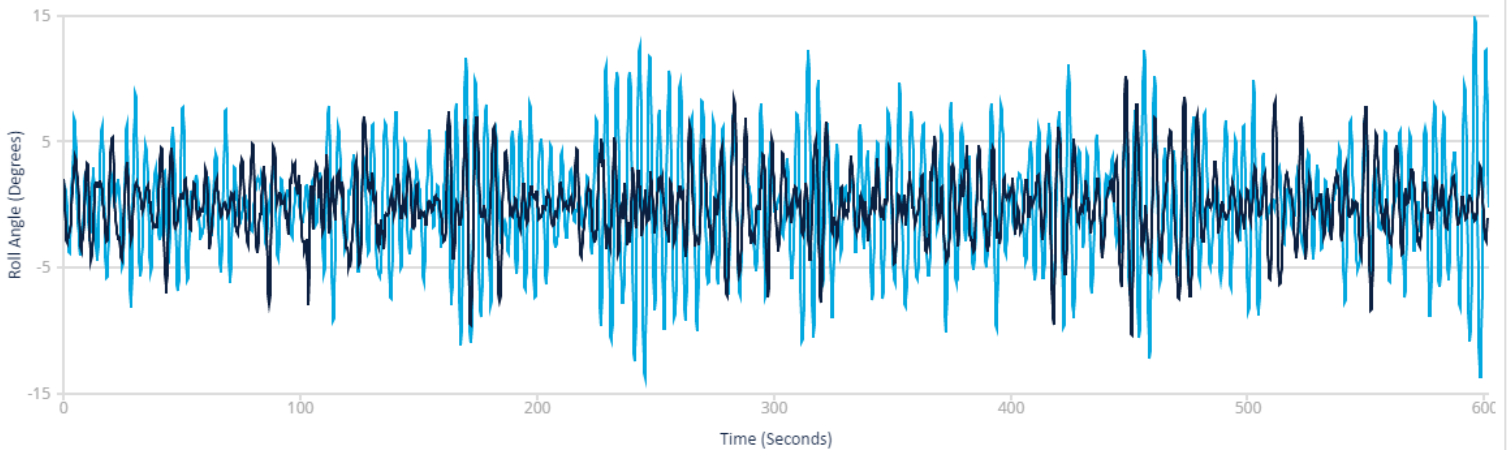

72% ROLL REDUCTION

Notice to Consumer:

The measured roll data contained in this report represents the performance of the Seakeeper system on a specific vessel in an estimated sea condition. It is provided as a guideline and should not be relied upon as representative of performance on this vessel in other sea conditions or on other vessels. Please contact Seakeeper for gyro sizing and roll reduction predictions for your vessel.